

## LCC Series

# 1-10V Dimming LED Driver


1-10V调光LED恒流驱动器

## Features:

- Dimmable with low-voltage control signal(DC1...10V)
- Super slim design
- Driver for built-in use
- Push wire connections
- Three fixed selectable output currents
- For use in luminaires of protection class I
- Low ripple of output current for a higher quality of light
- high power factor
- Protections: opencircuit, shortcircuit, overload, overtemperature



- 适用低电压直流1...10V调光器
- 超细长紧凑设计
- 内置式驱动
- 按压式接线端子
- 3组可选择电流输出
- 适用I类灯具
- 低电流纹波输出, 无频闪
- 高功率因数设计
- 输出开路, 短路, 过载和超温保护

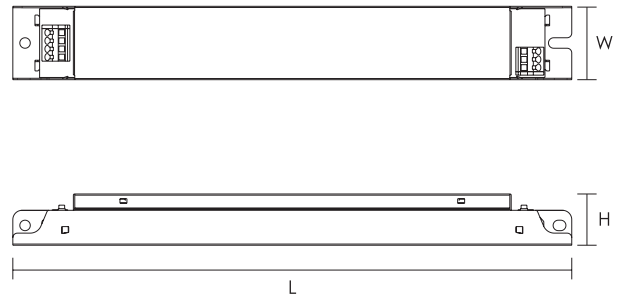

## Parameters:

Model No. 型号	Dimming mode 调光方式	Input voltage 额定电压 (V)	Max. output 功率 (W)	Output current 输出电流 (mA)	Output voltage 输出电压 (V)	Power factor 功率因数 (λ)	THD 总谐波 (%)	Efficiency full load 效率 (%)	Ambient temperature 环境温度 ta (°C)	Max. casing temperature 最大外壳温度 tc (°C)	Isolation 隔离	Dimensions LxWxH 尺寸 (mm)	Weight 重量 (g)
LCC1x20-AN(300mA)	1-10V	220-240	20	300	35-67	0.95	<15	84	-20...+50	80	SELV	210x31.5x22	220
LCC1x20-AN(350mA)	1-10V	220-240	20	350	28-57	0.95	<15	82	-20...+50	80	SELV	210x31.5x22	220
LCC1x20-AN(500mA)	1-10V	220-240	20	500	24-40	0.95	<15	82	-20...+50	80	SELV	210x31.5x22	220
LCC1x20-AN(700mA)	1-10V	220-240	20	700	18-30	0.95	<15	82	-20...+50	80	SELV	210x31.5x22	220
LCC1x40-AN	1-10V	220-240	28	350	10-80	0.95	<15	86	-20...+50	80	SELV	240x31.5x22	230
			40	500	10-80								
			40	700	10-60								