

## DIN Series

# 1-10V Dimming LED Driver


1-10V调光LED恒流驱动器

## Features:

- DIN rail LED driver
- Dimmable with low-voltage control signal (DC1...10V)
- Constant current driver
- Compact design
- Protections: opencircuit, shortcircuit, overload, overtemperature
- Simple installation
- SELV equivalent
- Cooling by free air convection
- Dimming range 1...100%



- 导轨式LED驱动器
- 适用低电压直流1...10V调光器
- 恒流驱动
- 超小体积紧凑型设计
- 输出开路, 短路, 过载和超温保护
- 安装经济便捷
- 符合安全特低电压标准
- 自然风冷
- 调光范围 1...100%光通量

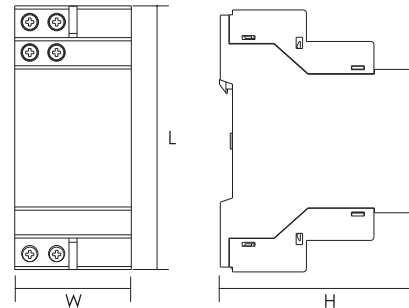

## Parameters:

Model No. 型号	Input voltage 额定电压 (V)	Max. output 功率 (W)	Output current 输出电流 (mA)	Output voltage 输出电压 (V)	Power factor 功率因数 (λ)	Efficiency full load 效率 (%)	No-load power 空载功率 (W)	Ambient temperature 环境温度 ta (°C)	Max. casing temperature 最大外壳温度 tc (°C)	Isolation 隔离	Dimensions LxWxH 尺寸 (mm)	Weight 重量 (g)
DIN350-10	220-240	10	350	12-28	0.90C	80	<1.0	-20...+50	80	SELV	82x36x62	100
DIN350-20	220-240	20	350	25-56	0.90C	83	<1.0	-20...+50	80	SELV	82x36x62	100
DIN500-22	220-240	22	500	20-40	0.90C	80	<1.0	-20...+50	80	SELV	82x36x62	100
DIN700-20	220-240	20	700	14-29	0.90C	83	<1.0	-20...+50	80	SELV	82x36x62	100